

Hybrid Series



 Proudly Made in Canada

Hybrid Series

WOOD & COMBINATION FUEL FURNACES

Continental's Hybrid Multi Fuel Combination Furnaces are extremely clean burning wood furnaces that are certified to the latest emission standards (CSA B415.1-10) and boast efficiency ratings as high as 88.6%. The Continental® Hybrid Series are some of the cleanest and most efficient combination solid fuel-burning furnaces on the market today.



Advanced Combustion System

A stainless steel tube combustion system achieves a secondary burn cycle. Not only are you getting energy from the wood, but also from the wood gases which are mixed at the precise ratio of temperature and oxygen. To achieve an extraordinarily clean burn without a catalytic combustor, horizontal jets of super heated secondary air are mixed with the fire's smoke to burn off released smoke particles. You can watch the torch-like secondary flames just below the ceiling during the burn. This results in more heat, cleaner exhaust, fast start up, less chimney maintenance and less trips to the woodpile.



Solid Construction and Automatic Combustor Control

Hybrid Series furnaces come standard with a fully welded and refractory brick lined combustion chamber, similar to a kiln, for many years of safe and trouble free performance. The thermostat sets the desired heat level for a roaring fire and then shuts down for a long, clean and consistent burn. A Bypass Exhaust Damper built into the Hybrid 150 and Hybrid 200 ensures quick, clean start ups.

Triple Fuel Combination for Peace of Mind

Go away for an extended period without worrying about keeping your wood furnace operational. The Continental® Hybrid Series furnaces switch from wood to the secondary heating source automatically. If the furnace runs out of wood, a second thermostat controlling the optional electric, oil or gas components will keep your home warm and toasty even if you are not at home. During power failures, the wood furnaces are designed to use gravity air flow for emergency heating. High fire can be maintained by using a manual override on the primary air control. The stainless steel combustion chamber/heat exchanger of the oil furnace module (CHMF150 and CHMF200 models only) can be connected to your choice of Beckett or Riello high-efficiency burners to give you many years of reliable and safe performance. Depending on the Hybrid model, optional electric heating modules are available in 15, 18, 20 and 25 kW ratings.



Hybrid 100

For heating requirements up to 1400 sq. ft. the Hybrid 100 is up to the task. It can be connected to a new or existing ducting system to distribute air throughout the home or completed with the diffuser kit option to circulate heated air directly into a room.

1. Variable speed motor
2. Blower
3. Optional electric element (10 kW)
4. High temperature refractory liner
5. Opening for return air duct (left, right or rear panel location)
6. Firebox
7. Baffle
8. 6" top mount flue
9. Opening for supply plenum
10. Heat exchanger surfaces
11. Cabinet
12. Manual air choke
13. Four secondary air tubes
14. Airwash to keep the glass clean
15. Ceramic glass cast door
16. 4" Ash lip
17. Air damper motor
18. Door switch
19. Levelling legs
20. Air filter

Small size:
29" wide x 29"
deep x 44" high

Panel construction
allows for extreme
reduced clearances
to combustibles

Self contained unit – blower,
electrical controls and
optional 10 kW electrical
backup heater mount
internally

Adjustable return air
configuration (rear or
side mount)


Flue through top of furnace reduces clearance to combustibles at back of unit – smallest clearance to combustibles in the wood furnace market

Automatic air control with
manual choke, creating a
fully variable burn rate for
ultimate heating comfort

A finned heat exchanger
surface allows for
optimized efficiency

Extremely low emissions
at 3.6 grams per hour,
with a firebox volume
of 2.0 ft³

Four speed 1/6 - 1/12 HP
variable speed motor

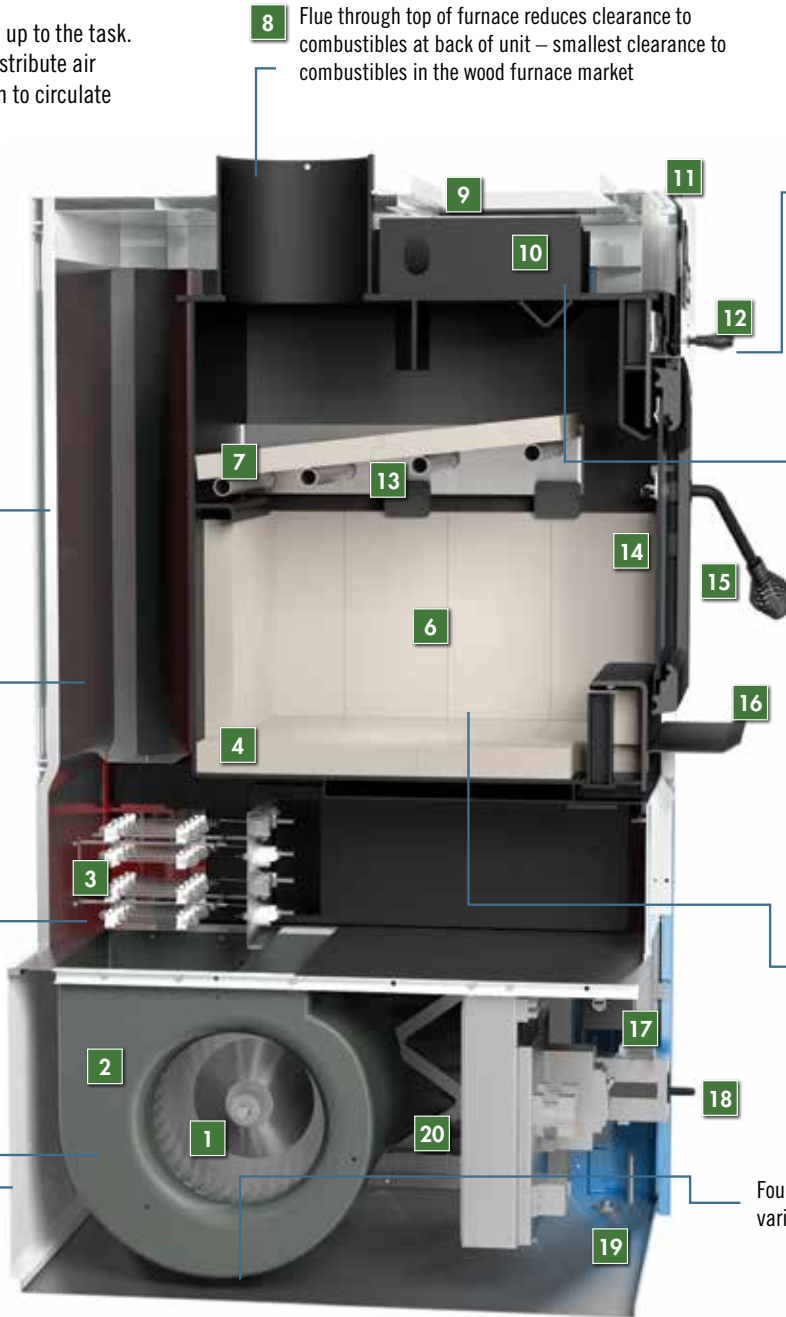

“Wood is the most affordable and accessible renewable energy resource for residential heating in North America.”

Optional diffusion
plenum kit available
(HMFK - DP).



Hybrid 150 & 200

The Hybrid 150 and Hybrid 200 offer the same advanced features with the 200 having a larger firebox, higher heating capacity and accepts a higher kW electrical element.


With a firebox volume of 3.4 cubic foot the Hybrid 150 will handle heating requirements for up to 2000 square feet while the Hybrid 200's 4.5 cubic feet capacity will provide heat for areas up to 3000 square feet.

1. Clean out door
2. Wood heat exchangers
3. Cabinet
4. Bypass damper
5. Ceramic glass or solid insulated cast door
6. 4" Ash lip
7. Ash dump & pan
8. Optional stainless steel oil combustion & heat exchanger module
9. Opening for ductwork
10. Air control
11. Direct outside air
12. 6" Flue
13. Outside air collar
14. Bypass damper control rod
15. Baffle
16. Stainless steel secondary air tubes
17. High temperature refractory liner
18. Oil exhaust
19. Opening for return air duct (left or right side option)
20. Blower (left or right side option)
21. Optional electric element (15, 18, 20 kW for CHMF150 and 18, 20 & 25 kW for CHMF200)
22. Optional oil burner module (featuring Riello and Beckett burners)
23. Wood fire chamber
24. Stainless steel replaceable airwash system
25. Levelling legs
26. Cleaning brush and rod included
27. Heat resistant leather gloves included



Optional electric element.
Available in 15, 18, 20 kW for Hybrid 150 and 18, 20 & 25 kW for Hybrid 200

Return air designed to use standard 16" x 25" furnace filters.

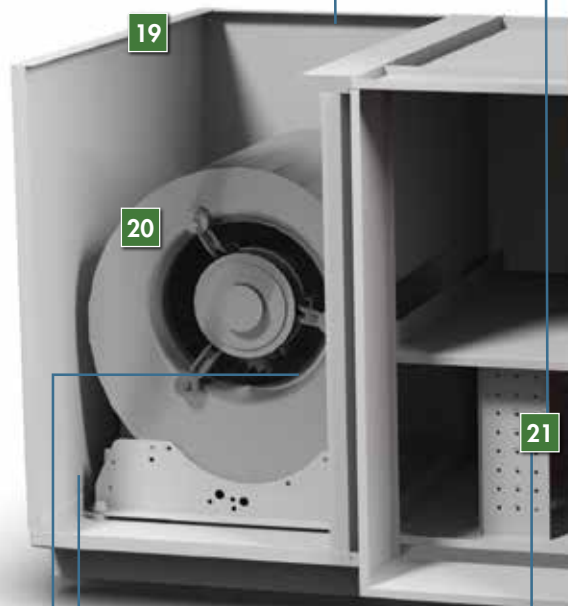

Blower, air ducts and electric furnace module can be installed on the left or right side of the furnace for versatile installations.

The modular component design allows the blower module to be moved to either side of the main furnace to facilitate installation.

3. Heavy duty, 24 gauge powder coated cabinet features sound dampening, high density fibre insulation.



Modular Design Flexible Installations

Continental's Canadian Made C96 gas furnace has been configured to operate with the multi-fuel Hybrid 150 and Hybrid 200. Combining the environmentally friendly features of the Hybrid furnaces with the efficiency of the C96 gas furnace offers superior performance. The Hybrid 150 and Hybrid 200 can also operate with oil or electric secondary heat sources. High efficiency has never been greener thanks to renewable energy and superior engineering.

Continental's Hybrid furnaces are designed with features such as insulated cabinets and knockouts on both sides to offer multiple configuration options and incredibly low clearances for easy installation.

The Hybrid 150 and Hybrid 200 configurations can be seen on the right - left hand return air configurations are shown, right hand return air configurations can be achieved by easy reversal of side panels.



Combined with a Continental Gas Furnace and the HMFK-GT Transition kit



Wood only furnace




Outside air enters the firebox through a stainless steel tube.

4 The manual bypass damper allows the unit to perform a quicker, cleaner startup.



Choose between a glass or solid door. Glass allows you to see the fire and feel the heat radiating into the room where the furnace is located. A solid, insulated door offers maximum heat distribution through the ductwork to the entire house.



Cast iron door with ceramic fibre insulation and cover.




Cast iron door with ceramic viewing glass.

13 A four inch port draws air directly from the outside into the combustion chamber for maximum efficiency.

12 6" flue increases to 7" if oil option is added.

10 Thermostatic air control regulates primary air and burn rate.

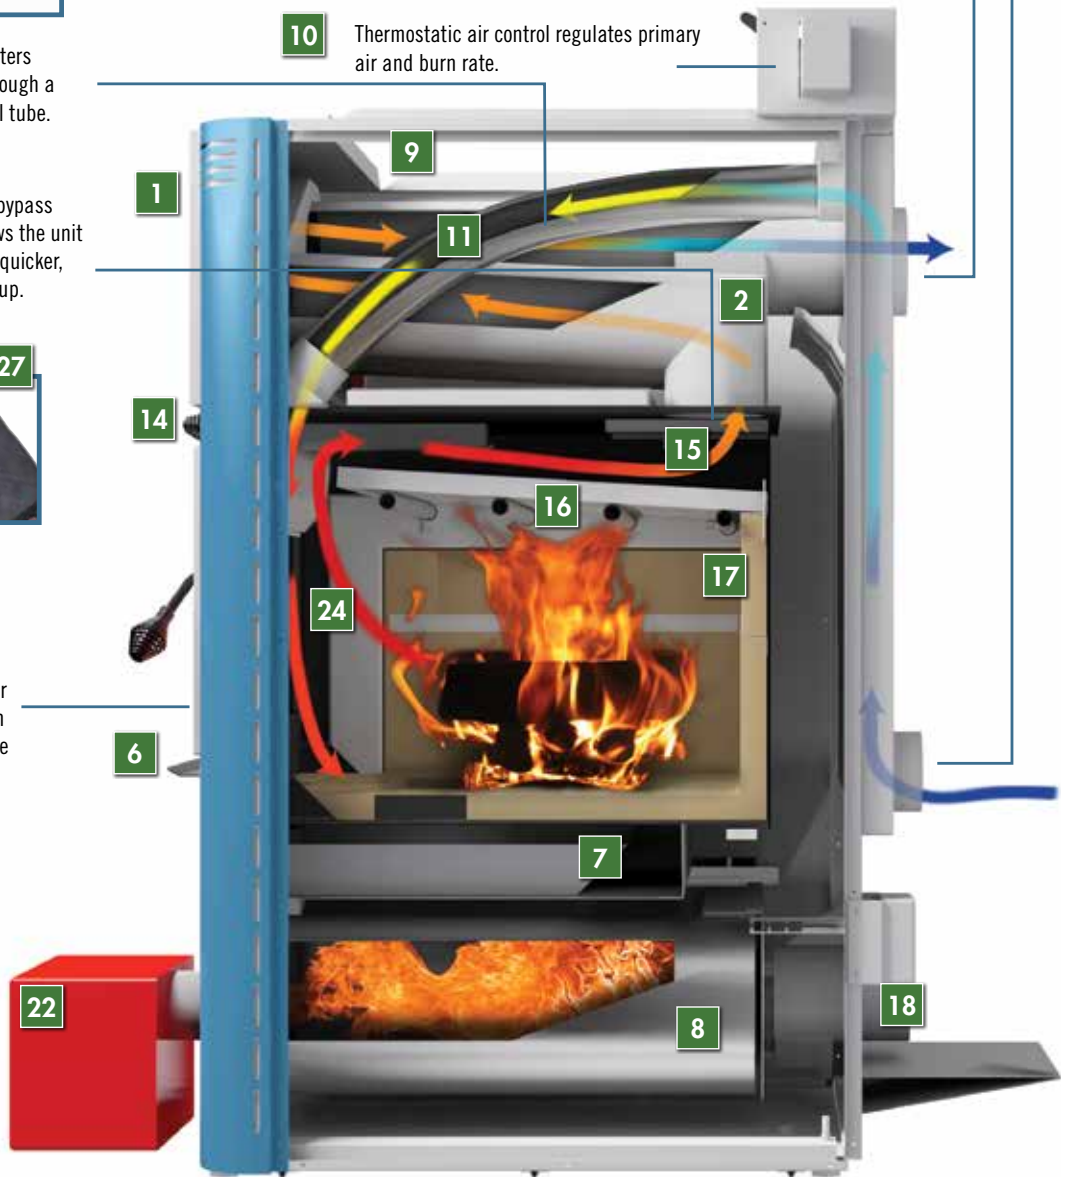

A combination wood / oil furnace



A combination wood / electric furnace




A triple-fuel wood / oil / electric furnace



Add-on wood furnace to your existing heating system

SPECIFICATIONS

	HYBRID 100	HYBRID 150	HYBRID 200
Maximum input capacity (wood)*	76,000 BTU's	150,000 BTU's	200,000 BTU's
Maximum output capacity (wood)*	65,000 BTU's	110,000 BTU's	150,000 BTU's*
Average output capacity (wood)* - see graph below	35,000 BTU's*	60,000 BTU's*	100,000 BTU's*
Optional oil furnace module (input)	-	70,000 - 93,000 BTU's / Up to 85% AFUE	70,000 - 93,000 BTU's / Up to 85% AFUE
Electric furnace module (optional)	10 kW	51,000 - 70,000 BTU's (15 - 20 kW)	70,000 - 85,000 BTU's (18 - 25 kW)
Efficiency (wood) (maximum)**	86%	88.6%	85%
Emissions (wood)	3.6 grams per hour	3.4 grams per hour	4.5 grams per hour
Blower	4 speeds - 500-700 CFM	4 speed - 1200 CFM	4 speed - 1400 CFM
Recommended exhaust pipe size (wood only), (in)	6	6	6
Recommended exhaust pipe size (wood / oil / combo), (in)	-	7	7
Type of chimney	High temperature 6"	High temperature 6"	High temperature 6"
Max. Log length (in)	18	24	30
Loading capacity	2.0 cu. ft.	3.4 cu. ft. / APR 80Pds	5 cu. ft. / APR 80Pds
Furnace dimensions (complete with blower), (in)	29 w x 29 d x 45 h	48 w x 32 d x 52 h	48 w x 39 d x 52 h
Furnace dimensions (wood / oil with blower), (in)	-	48 w x 42 d x 52 h	48 w x 49 d x 52 h
Furnace dimensions (wood / electric with blower), (in)	-	60 w x 32 d x 52 h	60 w x 39 d x 52 h
Furnace dimensions (wood / electric/ oil with blower), (in)	-	60 w x 42 d x 52 h	60 w x 49 d x 52 h
Minimum clearance to combustibles (in)	6 back / sides x 48 front	14 sides x 24 back x 48 front	14 sides x 24 back x 48 front
Firebox dimensions (in)	20 7/8 w x 14 5/8 d x 11 5/8 h	18 w x 24 d x 13 1/2 h	20 w x 32 d x 13 1/2 h
Firebox front opening (in)	17 1/8 w x 9 1/2 h	16 1/2 w x 9 1/2 h	16 1/2 w x 9 1/2 h
Hot air plenum dimensions (in)	22 w x 7 1/2 d	22 w x 24 d	22 w x 31 d
Cold air plenum dimensions (in)	14 w x 10 d	14 w x 23 d	14 w x 23 d

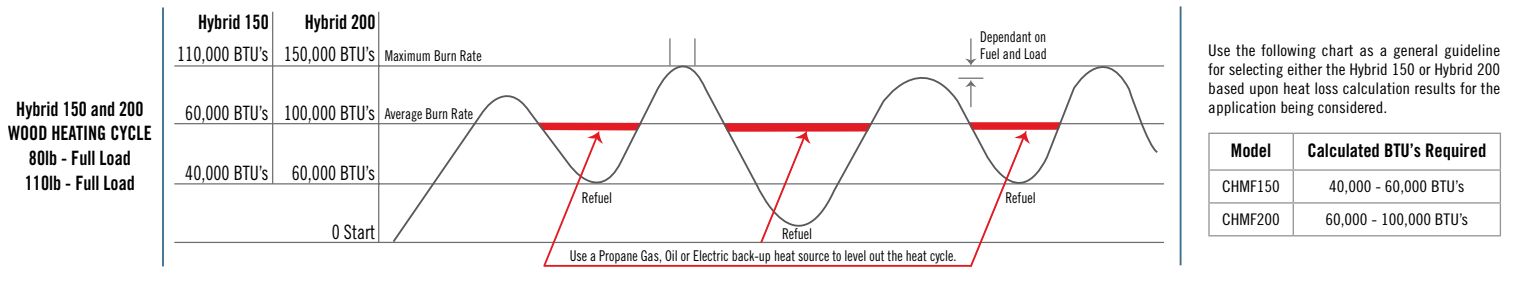

*BTU output is not a continuous, steady output; it cycles by the amount and frequency with which the fuel is loaded in the furnace.
 ** Depending on burn conditions
 Certification Standards: CSA B366.1-M91, B140.4-04, B212-00, UL 1995/CSA C22.2 No.236, UL 391, UL 727, CSA B415.1-10
 All specifications and designs can change. Registered trademark of Wolf Steel Ltd.

All specifications and designs can change without notice to allow for on-going product improvement. Images may not be exactly as shown. Consult your owner's manual for current information. Check all local and national building codes and gas regulations. Continental is a registered trademark of Wolf Steel Ltd. © Wolf Steel Ltd.

Authorized Dealer



- 24 Napoleon Road, Barrie, Ontario, Canada L4M 0G8
- 103 Miller Drive, Crittenden, Kentucky, USA 41030
- 7200 Trans Canada Highway, Montréal, QC, Canada, H4T 1A3

Tel: 1-800-461-5581 Fax: (705) 725-1150
 continentalheatingandcooling.com



Proudly Made in Canada

