


ASCENT™ LINEAR 36 DIRECT VENT GAS FIREPLACE



Specifications

Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	
BL36	16,000	35 1/8"	37 5/8"	34 1/2"	36"	16 1/8"	16 3/8"	16 3/4" X 30 9/16"

Front Options

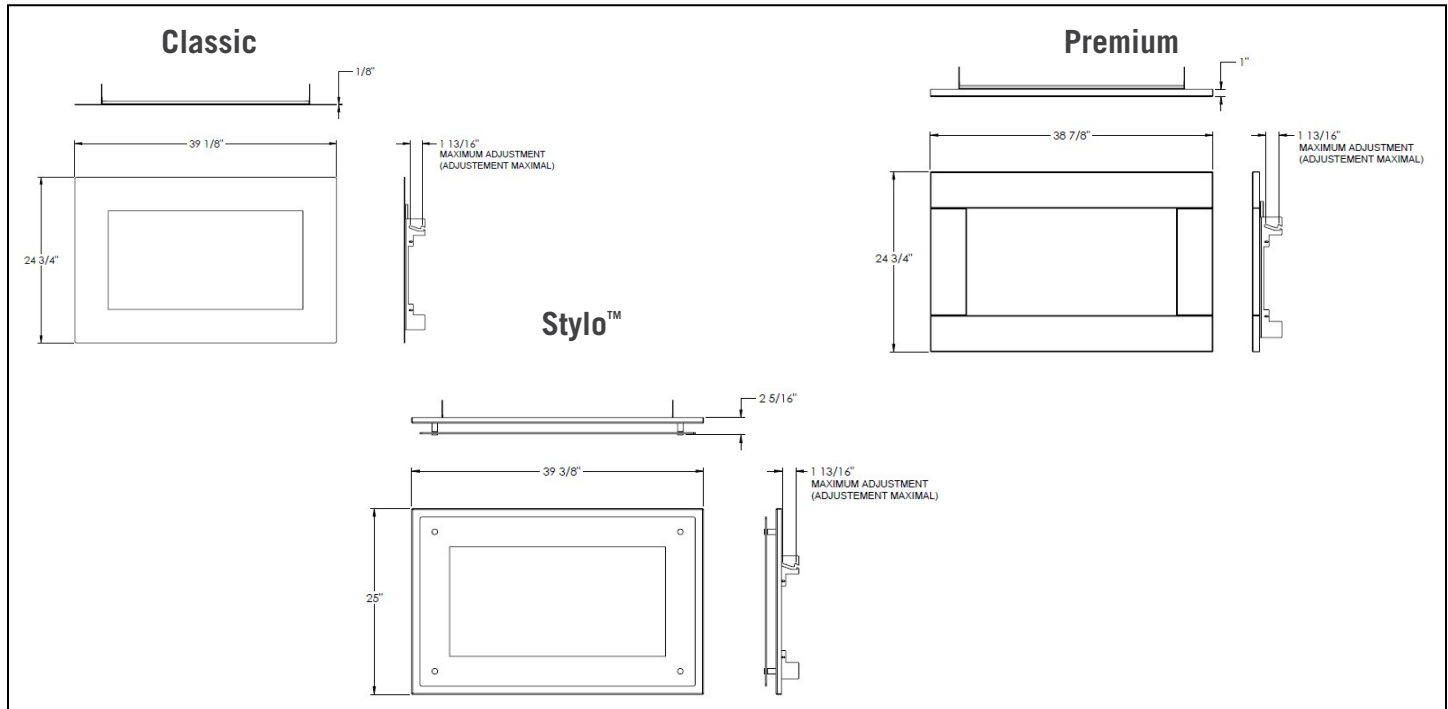

Minimum Framing Clearances

Minimum clearance to combustible construction from appliance and vent surfaces:

Combustible Framing:

- 0" to stand-offs
- 1" (25mm) to bottom and sides of the vent pipe*
- 3" (76mm) to top of the vent pipe*

Combustible Finishing:


- 0" to rear stand offs
- 4 1/2" (114mm) to front face top and 3" (76mm) to sides
- 53" (1346mm) to combustible enclosure top from base of the appliance
- 53" (1346mm) to ceiling from base of the appliance

*** BL36 HORIZONTAL VENT SECTIONS:** A minimum of 1" (25mm) at the bottom and sides and 3" (76mm) at the top of the vent pipe on all horizontal runs to combustibles is required. Use firestop spacer W010-1800 (supplied).


NOTE: The minimum clearances from the top of the horizontal vent pipe to combustible materials may be reduced from 3" (76mm) to 1" (25mm) in those installations with a minimum 38" (965mm) vertical vent rise made immediately off the fireplace collar.

*** BL36 VERTICAL VENT SECTIONS:** A minimum of 1" (25mm) all around the vent pipe on all vertical runs to combustibles is required except for clearances in appliance enclosures. See "MINIMUM ENCLOSURE CLEARANCES" section. Use firestop spacer W500-0096 (not supplied).

Minimum Framing Clearances

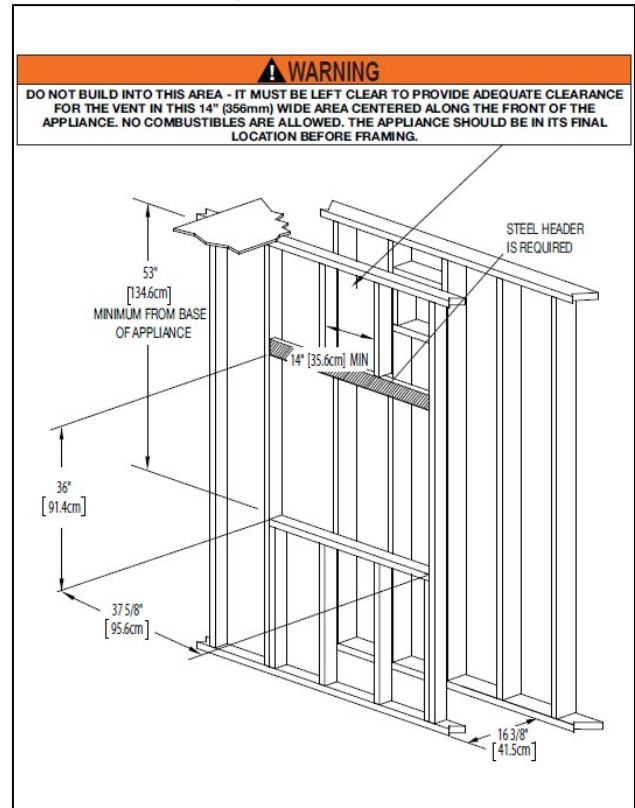

Dimensions

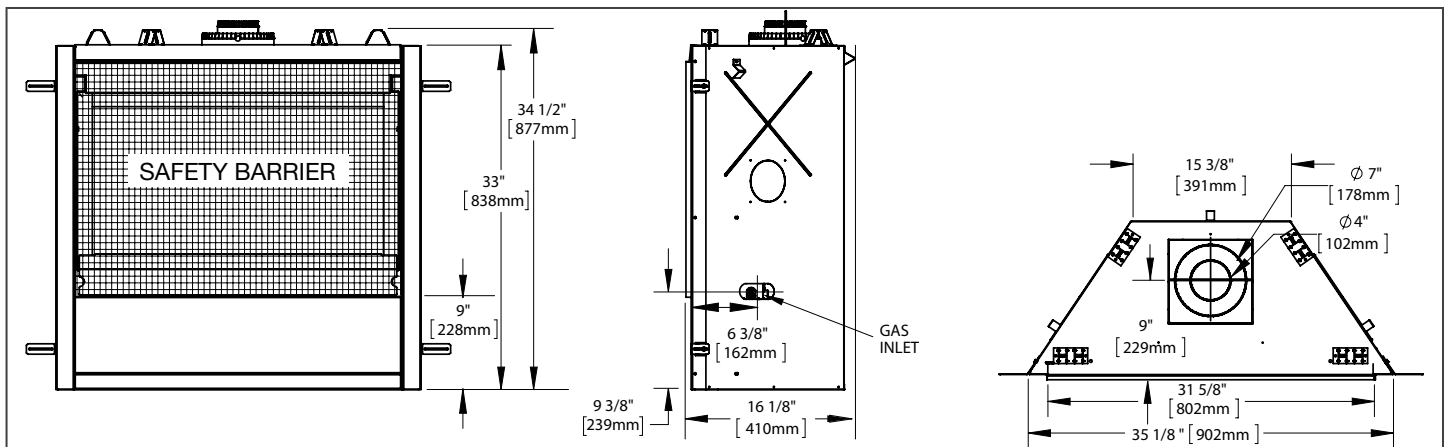

TOP VENT

COMBUSTIBLE

NON-COMBUSTIBLE

53" [134.6cm] CEILING (MIN.)

4 1/2" [114mm] TOP OF APPLIANCE OPENING

NON-COMBUSTIBLE MATERIAL

COMBUSTIBLE MATERIAL

1" [25mm]

41 1/8" [104.5cm] MIN. PLUS RISE *

5" [127mm]

7" [178mm] MIN.

3" [76mm]

0" (0mm) IF NON-COMBUSTIBLE FINISHING IS USED SUCH AS BRICK AND STONE.

STEEL HEADER

3" (76.2mm)

2" (50.8mm)

0" (0mm)

6" (152.4mm)

5" (127mm)

4" (101.6mm)

TOP OF APPLIANCE

DOOR WITH SAFETY BARRIER

3" [76mm]

31 1/2" [80cm]

4 1/2" [114mm]

27" [68.6cm]

NON-COMBUSTIBLE

COMBUSTIBLE

MH
AE
NI
TG
EH
LT

12" (30.5cm)
10" (254mm)
8" (203.2mm)
6" (152.4mm)
4" (101.6mm)
2" (50.8mm)

0 2 4 6 8 10 12

MANTEL DEPTH (INCHES)

8" [203.2mm] MANTEL
6" [152.4mm]
4" [101.6mm]
2" [50.8mm]
[152.4mm]
4"
[101.6mm]
2" [50.8mm]
TOP OF APPLIANCE OPENING
33" [83.8cm]

[illegible]